


## VCGT 22-FA


	d	d <sub>1</sub>	l	s
2205	12,700	5,20	22,00	5,50

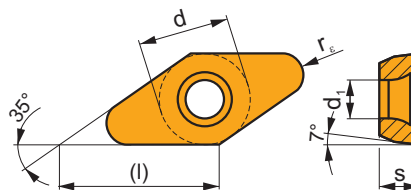

i	ISO	Material	P	M	K	N	S	H	Coating	Lubrication	r <sub>e</sub>	f <sub>min</sub>	f <sub>max</sub>	a <sub>p min</sub>	a <sub>p max</sub>
1	VCGT 220515F-FA	HF7				■			●	+/-	1,5	0,05	1,00	0,5	20,0
	VCGT 220520F-FA	HF7				■			●	+/-	2,0	0,05	1,50	0,5	18,0

## XDHW

	d	d <sub>1</sub>	l	s
0702	6,500	2,95	6,90	2,38
10T3	10,000	3,95	10,60	3,97

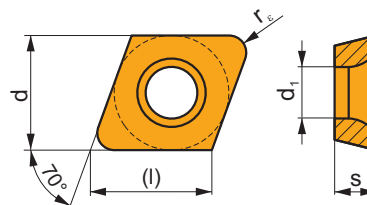

i	ISO	Material	P	M	K	N	S	H	Coating	Lubrication	r <sub>e</sub>	f <sub>min</sub>	f <sub>max</sub>	a <sub>p min</sub>	a <sub>p max</sub>
E	XDHW 070210EN	M8310	■	□	■			■	☉	-	1,0	0,05	0,22	0,2	1,0
		M8325	■	□	□				☉	-	1,0	0,05	0,22	0,2	1,0
S	XDHW 070210SN	M8310	■	□	■			■	☒	-	1,0	0,05	0,22	0,2	1,0
		M8325	■	□	□				☒	-	1,0	0,05	0,22	0,2	1,0
	XDHW 10T310SN	M8310	■	□	■			■	☒	-	1,0	0,05	0,35	0,2	1,0
		M8325	■	□	□				☒	-	1,0	0,05	0,35	0,2	1,0