



D90-C

P M K N S H

S(P)

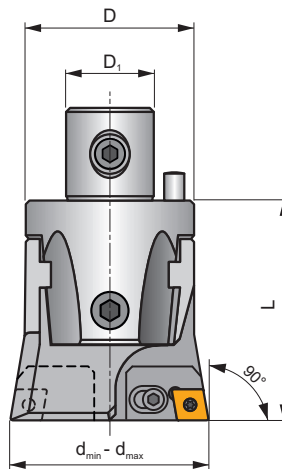

ISO	Size	d _{min}	d _{max}	D	D ₁	L										
D 06890 300	68	80	102	68	36	86	2CT 90 300	US 0616	HXX 5	TC.. 16T3..	US 0408-T15P	SDR T15P	HXX 4	HXX 8	2,17	
D 06890 402	68	80	102	68	36	86	2CT 90 402	US 0616	HXX 5	CC.. 1204..	US 0509-T20P	SDR T20P	HXX 4	HXX 8	2,15	
D 06890 402N	68	80	102	68	36	86	2CT 90 402 N	US 0616	HXX 5	CN.. 1204..	US 0613-H25	HXX 2.5	HXX 4	HXX 8	2,18	
D 08590 300	85	100	125	85	50	100	3CT 90 300	US 0625	HXX 5	TC.. 16T3..	US 0415-T15P	SDR T15P	HXX 5	HXX 8	4,15	
D 08590 402	85	100	125	85	50	100	3CT 90 402	US 0625	HXX 5	CC.. 1204..	US 0513-T20P	SDR T20P	HXX 5	HXX 8	4,12	
D 08590 402 N	85	100	125	85	50	100	3CT 90 402 N	US 0625	HXX 5	CN.. 1204..	US 0613-H25	HXX 2.5	HXX 5	HXX 8	4,17	
D 10090 300	100	125	160	110	60	100	3CT 90 300	US 0625	HXX 5	TC.. 16T3..	US 0415-T15P	SDR T15P	HXX 5	HXX 8	6,60	
D 10090 402	100	125	160	110	60	100	3CT 90 402	US 0625	HXX 5	CC.. 1204..	US 0513-T20P	SDR T20P	HXX 5	HXX 8	6,54	
D 10090 402 N	100	125	160	110	60	100	3CT 90 402 N	US 0625	HXX 5	CN.. 1204..	US 0613-H25	HXX 2.5	HXX 5	HXX 8	6,30	
D 20090 300	200	160	220	145	60	100	3CT 90 300	US 0625	HXX 5	TC.. 16T3..	US 0415-T15P	SDR T15P	HXX 5	HXX 8	8,95	
D 20090 402	200	160	220	145	60	100	3CT 90 402	US 0625	HXX 5	CC.. 1204..	US 0513-T20P	SDR T20P	HXX 5	HXX 8	8,95	
D 20090 402 N	200	160	220	145	60	100	3CT 90 402 N	US 0625	HXX 5	CN.. 1204..	US 0613-H25	HXX 2.5	HXX 5	HXX 8	8,95	