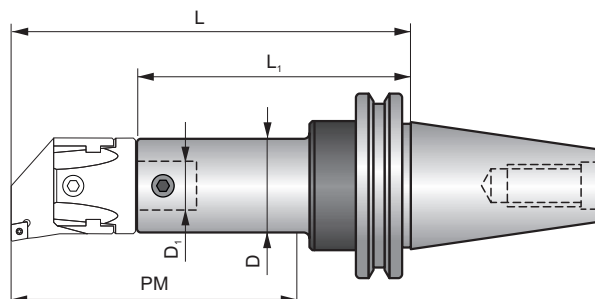






BT-BS



ISO		Size	D	D ₁	L	L ₁	PM			
BT 330 022 100 R	30	22	22	12	125	91	100	✓	US 0608	0,60
BT 330 027 055 R	30	27	27	15	77	35	55	✓	US 0609	0,50
BT 330 027 100 R	30	27	27	15	125	83	100	✓	US 0609	0,65
BT 330 032 060 R	30	32	32	20	83	38	60	✓	US 0810	0,49
BT 330 032 100 R	30	32	32	20	125	80	100	✓	US 0810	0,70
BT 330 042 075 R	30	42	42	24	100	44	75	✓	US 1014	0,59
BT 340 022 050 R	40	22	22	12	80	46	50	✓	US 0608	1,12
BT 340 022 080 R	40	22	22	12	110	76	80	✓	US 0608	1,16
BT 340 022 100 R	40	22	22	12	130	96	100	✓	US 0608	1,25
BT 340 027 055 R	40	27	27	15	82	40	55	✓	US 0609	1,06
BT 340 027 100 R	40	27	27	15	130	88	100	✓	US 0609	1,26
BT 340 027 130 R	40	27	27	15	160	118	130	✓	US 0609	1,39
BT 340 032 060 R	40	32	32	20	88	43	60	✓	US 0810	1,08
BT 340 032 100 R	40	32	32	20	130	85	100	✓	US 0810	1,31
BT 340 032 130 R	40	32	32	20	160	115	130	✓	US 0810	1,50
BT 340 042 075 R	40	42	42	24	104	48	75	✓	US 1014	1,14
BT 340 042 160 R	40	42	42	24	190	134	160	✓	US 1014	2,05
BT 340 042 200 R	40	42	42	24	230	174	200	✓	US 1014	2,69
BT 340 054 090 R	40	54	54	28	120	54	90	✓	US 1219	1,13
BT 340 054 160 R	40	54	54	28	190	124	160	✓	US 1219	2,60
BT 340 054 200 R	40	54	54	28	230	164	200	✓	US 1219	3,10
BT 340 068 160 R	40	68	68	36	181	95	160	✓	US 1625	2,80
BT 340 068 200 R	40	68	68	36	221	135	200	✓	US 1625	4,00
BT 340 085 200 R	40	85	85	50	220	120	200	✓	US 1630	4,13
BT 340 100 200 R	40	100, 200	100	60	220	120	200	✓	US 2032	4,83
BT 350 022 080 R	50	22	22	12	121	87	80	✓	US 0608	3,95
BT 350 022 100 R	50	22	22	12	141	107	100	✓	US 0608	4,00
BT 350 027 055 R	50	27	27	15	93	51	55	✓	US 0609	3,87
BT 350 027 100 R	50	27	27	15	141	99	100	✓	US 0609	4,00
BT 350 027 130 R	50	27	27	15	171	129	130	✓	US 0609	4,14
BT 350 032 060 R	50	32	32	20	99	54	60	✓	US 0810	2,98
BT 350 032 130 R	50	32	32	20	171	126	130	✓	US 0810	4,24
BT 350 032 160 R	50	32	32	20	201	156	160	✓	US 0810	4,50
BT 350 042 075 R	50	42	42	24	115	59	75	✓	US 1014	3,84
BT 350 042 160 R	50	42	42	24	201	145	160	✓	US 1014	3,87
BT 350 042 200 R	50	42	42	24	241	185	200	✓	US 1014	5,25
BT 350 054 090 R	50	54	54	28	131	65	90	✓	US 1219	4,20
BT 350 054 160 R	50	54	54	28	201	135	160	✓	US 1219	5,00
BT 350 054 200 R	50	54	54	28	241	175	200	✓	US 1219	5,98
BT 350 068 115 R	50	68	68	36	154	68	115	✓	US 1625	4,28

ISO		Size	D	D ₁	L	L ₁	PM			
BT 350 068 200 R	50	68	68	36	242	156	200	✓	US 1625	6,66
BT 350 068 260 R	50	68	68	36	302	216	260	✓	US 1625	8,53
BT 350 085 200 R	50	85	85	50	242	142	200	✓	US 1630	7,40
BT 350 085 260 R	50	85	85	50	302	202	260	✓	US 1630	10,49
BT 350 085 320 R	50	85	85	50	362	262	320	✓	US 1630	13,00
BT 350 100 170 R	50	100, 200	100	60	195	95	170	✓	US 2032	5,71
BT 350 100 260 R	50	100, 200	100	60	302	202	260	✓	US 2032	11,50
BT 350 100 320 R	50	100, 200	100	60	362	262	320	✓	US 2032	16,08
BT 550 160	50	300, 400, 500	100	60	160	70	125	-	US 1240	6,30