


### High-performance reamers



The solid carbide HPC reamer HR 500 operates with highest cutting rates and produces extremely high-quality holes. Therefore, it often enables considerable savings in the process costs. In addition, it provides very high process reliability.

Intermediate dimensions from Ø 1.97-20.1 mm possible on request.

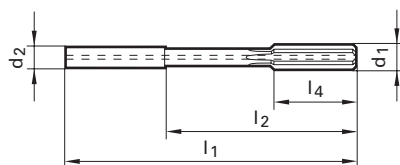

### Solid carbide



### Guhring no.

1685

1686

### Surface finish

a

a

### Discount group

166

166



Code no.	d1	d2 h6	l1	l2	l4	
	mm	mm	mm	mm	mm	
2.000	2.000	4.000	50.00	22.00	8.00	4
2.500	2.500	4.000	50.00	22.00	8.00	4
3.000	3.000	4.000	68.00	40.00	12.00	4
3.500	3.500	4.000	68.00	40.00	12.00	4
4.000	4.000	4.000	68.00	40.00	12.00	4
4.500	4.500	6.000	76.00	40.00	12.00	4
5.000	5.000	6.000	76.00	40.00	12.00	4
5.500	5.500	6.000	76.00	40.00	12.00	4
6.000	6.000	6.000	76.00	40.00	12.00	4
6.500	6.500	8.000	101.00	65.00	16.00	6
7.000	7.000	8.000	101.00	65.00	16.00	6
7.500	7.500	8.000	101.00	65.00	16.00	6
8.000	8.000	8.000	101.00	65.00	16.00	6
8.500	8.500	10.000	101.00	61.00	19.00	6
9.000	9.000	10.000	101.00	61.00	19.00	6
9.500	9.500	10.000	101.00	61.00	19.00	6
10.000	10.000	10.000	101.00	61.00	19.00	6
10.500	10.500	12.000	130.00	85.00	19.00	6
11.000	11.000	12.000	130.00	85.00	19.00	6
11.500	11.500	12.000	130.00	85.00	19.00	6
12.000	12.000	12.000	130.00	85.00	19.00	6
13.000	13.000	14.000	130.00	85.00	22.00	6
14.000	14.000	14.000	130.00	85.00	22.00	6
15.000	15.000	16.000	150.00	102.00	22.00	6
16.000	16.000	16.000	150.00	102.00	22.00	6
17.000	17.000	18.000	150.00	102.00	25.00	6
18.000	18.000	18.000	150.00	102.00	25.00	6
19.000	19.000	20.000	150.00	100.00	25.00	6
20.000	20.000	20.000	150.00	100.00	25.00	6

### Availability

