
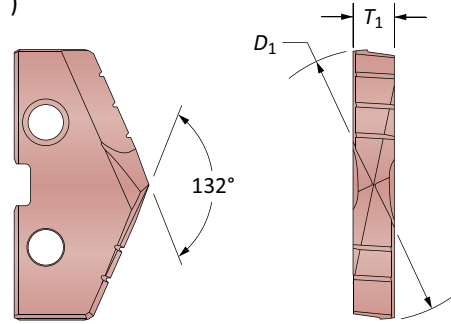




GEN2 T-A® Drill Inserts

3 Series | HSS | Diameter Range: 34.36mm - 47.80mm (1.353" - 1.882")




HSS Inserts – Super Cobalt

Insert				Part No.	
D_1 mm	D_1 inch	Fractional Equivalent	T_1 mm		
				AM200®	
35.72	1.4063	1-13/32	6.35	453H-0113	
36.00	1.4173	-		453H-36	
36.51	1.4375	1-7/16		453H-0114	
37.00	1.4567	-		453H-37	
37.31	1.4688	1-15/32		453H-0115	
38.00	1.4961	-		453H-38	
38.10	1.5000	1-1/2		453H-0116	
38.89	1.5313	1-17/32		453H-0117	
39.00	1.5354	-		453H-39	
39.29	1.5470	-		453H-1.547	
39.69	1.5625	1-9/16		453H-0118	
40.00	1.5748	-		453H-40	
40.48	1.5938	1-19/32		453H-0119	
41.00	1.6142	-		453H-41	
41.28	1.6250	1-5/8		453H-0120	
42.00	1.6535	-		453H-42	
42.07	1.6563	1-21/32		453H-0121	
42.86	1.6875	1-11/16		453H-0122	
43.00	1.6929	-		453H-43	
43.66	1.7188	1-23/32		453H-0123	
44.00	1.7323	-		453H-44	
44.45	1.7500	1-3/4		453H-0124	
45.00	1.7717	-		453H-45	
45.24	1.7813	1-25/32		453H-0125	
45.50	1.7913	-		453H-45.5	
45.64	1.7970	-		453H-1.797	
46.00	1.8110	-		453H-46	
46.04	1.8125	1-13/16		453H-0126	
46.83	1.8438	1-27/32	453H-0127		
47.00	1.8504	-	453H-47		
47.63	1.8750	1-7/8	453H-0128		



Coatings not listed above can be supplied as non-stocked standards.



Inserts sold in quantities of 1	
	
	AM200® = 131H-XXXX

 A DRILLING
 B BORING
 C REAMING
 D BURNISHING
 E THREADING
 X SPECIALS