


## Závitování | Tvářecí | G (BSP)



- První volba pro vysokou kvalitu a výkon
- HSE tvářecí závitník pro průchozí a slepé otvory
- Vícevrstvý povlak TiCN
- Pro závitování v běžných ocelích, hliníku a nerezových ocelích

|                      |                            |                       |                 |                  |                |                     |                       |       |
|----------------------|----------------------------|-----------------------|-----------------|------------------|----------------|---------------------|-----------------------|-------|
| <b>P</b><br>C < 0,2% | <b>P</b><br>0,25 < C < 0,4 | <b>P</b><br>C ≥ 0,45% | <b>P</b><br>SCM | <b>M</b><br>INOX | <b>N</b><br>Al | <b>N</b><br>AC, ADC | <b>H</b><br>25-35 HRC |       |
| 15-40                | 15-40                      | 15-30                 | 15-30           | 8-20             | 20-50          | 20-40               | 5-20                  | m/min |

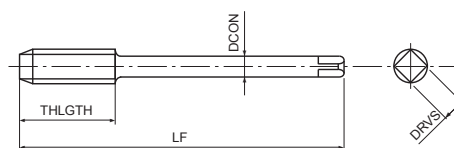

| EDP      | TD  | TP | LF  | THLGTH | DCON | DRVS | NOF | PHD           | DIN  |
|----------|-----|----|-----|--------|------|------|-----|---------------|------|
| 48064838 | 1/8 | 28 | 90  | 9      | 7    | 5,5  | 8   | 9,24 ~ 9,35   | 2189 |
| 48064839 | 1/4 | 19 | 100 | 13     | 11   | 9    | 8   | 12,41 ~ 12,62 | 2189 |
| 48064840 | 3/8 | 19 | 100 | 13     | 12   | 9    | 8   | 15,92 ~ 16,12 | 2189 |
| 48064841 | 1/2 | 14 | 125 | 18     | 16   | 12   | 8   | 19,93 ~ 20,15 | 2189 |
| 48064842 | 5/8 | 14 | 125 | 18     | 18   | 14,5 | 8   | 21,89 ~ 22,11 | 2189 |
| 48064843 | 3/4 | 14 | 140 | 18     | 20   | 16   | 8   | 25,42 ~ 25,64 | 2189 |
| 48064844 | 7/8 | 14 | 150 | 18     | 22   | 18   | 8   | 29,18 ~ 29,40 | 2189 |
| 48064845 | 1   | 11 | 160 | 23     | 25   | 20   | 8   | 31,92 ~ 32,20 | 2189 |

