



**R**


**D**

**M**


**X**




Shape



Clearance Angle



Tolerance  
d ± 0.05  
s ± 0.13



Fixing  
Chip breaker

Insert Designation	Grade	l	s	r	Direction	Catalog Nr.
RDMX 10T3 M0	LT 30	10	3.97	-	Neutral	M0001552
RDMX 1204 M0	LT 30	12	4.76	-	Neutral	M0001553

Surfacing Insert Lead angle 90°

Multi purpose Round insert. Suitable for Roughing to Semi-Finishing Copying of 3D surfaces and Face Milling operations.

Application Guide



**F** ⇒  
Productivity

**Coolant**  
1, 2, 3, 4 No  
7, 8, 11 No  
10, 12 Yes  
5, 6, 9 Yes

**Stainless Steel**  
V<sub>C</sub>


Machine Recommendations Guide. Details on page 10

**End Mill for RDMX 10T3 MO**

Cutter Designation	D	D1	d	L1	L	Ap	z	$\alpha$	Catalog Nr.
LT 100 WL-W-D020/2	20	10	20	42	180	5	2	12	M2000683
LT 100 WL-W-D025/3	25	15	25	60	180	5	3	8	M2000684
LT 100 WL-W-D032/3	32	22	32	80	180	5	3	5	M2000685

Screw: M2000597

Key: M2000602

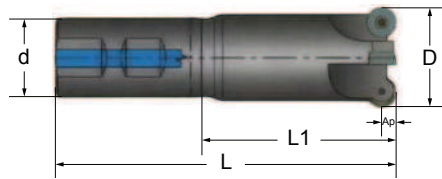


**Shell Mill for RDMX 1204 MO**

Cutter Designation	D	D1	d	L	Ap	z	$\alpha$	Catalog Nr.
LT 120 M-W-D040/4	40	28	16	40	6	4	7	M2000691
LT 120 M-W-D050/4	50	38	22	50	6	4	5	M2001780
LT 120 M-W-D063/5	63	51	27	50	6	5	3.5	M2000689
LT 120 M-W-D080/6	80	68	32	50	6	6	2.5	M2000690
LT 120 M-W-D100/7	100	88	40	50	6	7	2	M2000688

RDMX

Screw: M2000597

Key: M2000602



## RDMX 10T3 M0 LT 30

Material Group	Gr. N°	VDI Group	Material Examples*	Hardness	D.O.C. [mm]		Feed [mm/tooth]		V <sub>c</sub> [m/min]		Optimal cutting conditions			
					min	max	min	max	min	max	D.O.C.	Feed	V <sub>c</sub>	
Steel	Non-alloyed	1	1	C35, Ck45, 1020,	125 HB	0.5	2.5	0.18	0.64	190	1.0	0.35	250	
		2	2	1045, 1060,	190 HB		2.5		0.64	300			220	
		3	3	28Mn6	250 HB		2.5		0.64	250			200	
	Low alloyed	2	6	42CrMo4, St50, Ck60, 4140, 4340, 100Cr6	180 HB	0.5	2.5	0.15	0.50	150	1.0	0.30	200	
			4,6		230 HB		2.5		0.50	150			210	180
			5,7		280 HB		2.5		0.44	130			190	150
			8		350 HB		2.5		0.44	130			170	140
	High alloyed	3	10	X40CrMoV5, H13, M42, D3, S6-5-2, 12Ni19	220 HB	0.5	1.8	0.12	0.44	90	0.8	0.27	130	
			10		280 HB		1.8		0.44	90			130	120
			11		320 HB		1.8		0.36	60			110	100
			11		350 HB		1.8		0.36	60			90	80
Stainless Steel	Austenitic	4	304, 316, X5CrNi18-9	180 HB	0.5	2.5	0.15	0.50	190	1.0	0.30	220		
		14		240 HB		2.5		0.44	160			210	190	
	Duplex	5	X2CrNiN23-4, S31500	290 HB	0.5	2.0	0.12	0.36	70	0.8	0.24	100		
		14		310 HB		2.0		0.36	120			90		
	Ferritic & Martensitic	6	410, X6Cr17, 17-4 PH, 430	200 HB	0.5	2.5	0.15	0.50	150	1.0	0.30	190		
				13		42 HRc		2.0	0.40			90	150	0.8
Cast Iron	Grey	7	GG20, GG40, EN-GJL-250, No30B	150 HB	0.5	2.5	0.18	0.64	150	1.0	0.35	200		
				200 HB		2.5		0.64	220			180		
				250 HB		2.5		0.64	190			160		
	Malleable & Nodular	8	GGG40, GGG70, 50005	150 HB	0.5	2.5	0.15	0.56	100	1.0	0.30	200		
				200 HB		2.5		0.56	180			150		
				250 HB		2.5		0.56	150			130		
High Temp. Alloys	Fe, Ni & Co based	9	Incoloy 800 Inconel 700 Stellite 21	240 HB	0.5	2.0	0.12	0.36	25	0.8	0.24	32		
				250 HB		2.0		0.36	45			30		
				350 HB		2.0		0.36	45			30		
	TI based	10	TiAl6V4 T40	- -	0.5	2.0	0.12	0.40	40	0.8	0.27	55		
			2.0	0.36		30		55	40					
Hardened Mat.	Steel	11	X100CrMo13, 440C, G-X260NiCr42	45 HRc	0.3	0.9	0.10	0.36	40	0.5	0.21	60		
				50 HRc		0.7		0.32	70			55		
				55 HRc		0.6		0.28	60			50		
	Chilled Cast Iron		40	Ni-Hard 2	400 HB	0.3	0.7	0.10	0.36	40	80	0.4	0.21	50
White Cast Iron		41	G-X300CrMo15	55 HRc	0.3	0.6	0.10	0.28	30	60	0.3	0.18	40	
NF	Al (>8%Si)	12	25	AlSi12	130 HB	0.5	2.5	0.18	0.64	200	400	1.0	0.38	280

## RDMX 1204 M0 LT 30

Material Group	Gr. N°	VDI Group	Material Examples*	Hardness	D.O.C. [mm]		Feed [mm/tooth]		V <sub>c</sub> [m/min]		Optimal cutting conditions			
					min	max	min	max	min	max	D.O.C.	Feed	V <sub>c</sub>	
Steel	Non-alloyed	1	1	C35, Ck45, 1020,	125 HB	0.5	3.0	0.25	0.74	190	1.3	0.35	250	
		2	2	1045, 1060,	190 HB		3.0		0.74	300			220	
		3	3	28Mn6	250 HB		3.0		0.74	250			200	
	Low alloyed	2	6	42CrMo4, St50, Ck60, 4140, 4340, 100Cr6	180 HB	0.5	3.0	0.21	0.58	150	1.3	0.30	200	
			4,6		230 HB		3.0		0.58	150			210	180
			5,7		280 HB		3.0		0.51	130			190	150
			8		350 HB		3.0		0.51	130			170	140
	High alloyed	3	10	X40CrMoV5, H13, M42, D3, S6-5-2, 12Ni19	220 HB	0.5	2.2	0.17	0.51	90	1.0	0.27	130	
			10		280 HB		2.2		0.51	90			130	120
			11		320 HB		2.2		0.41	60			110	100
			11		350 HB		2.2		0.41	60			90	80
Stainless Steel	Austenitic	4	304, 316, X5CrNi18-9	180 HB	0.5	3.0	0.21	0.58	190	1.3	0.30	220		
		14		240 HB		3.0		0.17	0.51			160	210	190
	Duplex	5	X2CrNiN23-4, S31500	290 HB	0.5	2.4	0.17	0.41	70	1.0	0.24	100		
		14		310 HB		2.4		0.41	120			90		
	Ferritic & Martensitic	6	410, X6Cr17, 17-4 PH, 430	200 HB	0.5	3.0	0.21	0.58	150	210	1.3	0.30	190	
				13		42 HRc		2.4	0.46	90			150	100
Cast Iron	Grey	7	GG20, GG40, EN-GJL-250, No30B	150 HB	0.5	3.0	0.25	0.74	150	1.3	0.35	200		
		15		200 HB		3.0		0.74	220			180		
		16		250 HB		3.0		0.74	190			160		
	Malleable & Nodular	8	GGG40, GGG70, 50005	150 HB	0.5	3.0	0.21	0.64	100	1.3	0.30	180		
		17,19		200 HB		3.0		0.64	180			150		
		18,20		250 HB		3.0		0.64	150			130		
High Temp. Alloys	Fe, Ni & Co based	9	Incoloy 800 Inconel 700 Stellite 21	240 HB	0.5	2.4	0.17	0.41	25	1.0	0.24	32		
		33		250 HB		2.4		0.41	45			30		
		34		350 HB		2.4		0.41	45			30		
	TI based	10	TiAl6V4 T40	-	0.5	2.4	0.17	0.46	40	1.0	0.27	55		
		37		-		2.4		0.41	30			55	40	
Hardened Mat.	Steel	11	X100CrMo13, 440C, G-X260NiCr42	45 HRc	0.3	1.1	0.14	0.41	40	0.7	0.21	60		
		38		50 HRc		0.9		0.37	70			55		
		38		55 HRc		0.8		0.32	60			50		
	Chilled Cast Iron	40	Ni-Hard 2	400 HB	0.3	0.9	0.14	0.41	40	80	0.5	0.21	50	
White Cast Iron	41	G-X300CrMo15	55 HRc	0.3	0.8	0.14	0.32	30	60	0.3	0.18	40		
NF	Al (>8%Si)	12	25	AlSi12	130 HB	0.5	3.0	0.25	0.74	200	400	1.3	0.38	280