


TN M EXT

	d	l	s
16	9,525	16,5	3,47
22	12,700	22,0	4,71

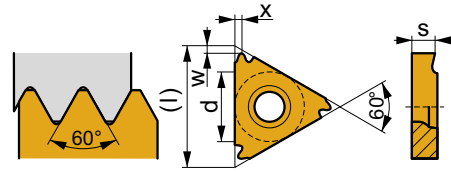

i	ISO	T8010	P	M	K	N	S	H	?	r _c	f _{min}	f _{max}	a _{p min}	a _{p max}	0,50	1 2 3 / 1"	x	w
	TN 16ER050M	T8010	■	■	■	□			●	+++	-	-	-	-	0,50	-	0,80	0,80
	TN 16ER075M	T8010	■	■	■	□			●	+++	-	-	-	-	0,75	-	0,80	0,80
1	TN 16ER080M	T8010	■	■	■	□			●	+++	-	-	-	-	0,80	-	0,60	0,80
U	TN 16ER100M	T8010	■	■	■	□			●	+++	-	-	-	-	1,00	-	0,80	0,80
E	TN 16ER125M	T8010	■	■	■	□			●	+++	-	-	-	-	1,25	-	0,80	0,80
	TN 16ER150M	T8010	■	■	■	□			●	+++	-	-	-	-	1,50	-	0,80	0,80
	TN 16ER175M	T8010	■	■	■	□			●	+++	-	-	-	-	1,75	-	1,50	1,20
	TN 16ER200M	T8010	■	■	■	□			●	+++	-	-	-	-	2,00	-	1,50	1,20
	TN 16ER250M	T8010	■	■	■	□			●	+++	-	-	-	-	2,50	-	1,50	1,20
	TN 16ER300M	T8010	■	■	■	□			●	+++	-	-	-	-	3,00	-	1,50	1,20
	TN 22ER350M	T8010	■	■	■	□			●	+++	-	-	-	-	3,50	-	2,50	1,80
	TN 22ER400M	T8010	■	■	■	□			●	+++	-	-	-	-	4,00	-	2,50	1,80
	TN 22ER450M	T8010	■	■	■	□			●	+++	-	-	-	-	4,50	-	2,50	1,80
	TN 22ER500M	T8010	■	■	■	□			●	+++	-	-	-	-	5,00	-	2,50	1,80
	TN 16EL100M	T8010	■	■	■	□			●	+++	-	-	-	-	1,00	-	0,80	0,80
1	TN 16EL125M	T8010	■	■	■	□			●	+++	-	-	-	-	1,25	-	0,80	0,80
U	TN 16EL150M	T8010	■	■	■	□			●	+++	-	-	-	-	1,50	-	0,80	0,80
E	TN 16EL175M	T8010	■	■	■	□			●	+++	-	-	-	-	1,75	-	1,50	1,20
	TN 16EL200M	T8010	■	■	■	□			●	+++	-	-	-	-	2,00	-	1,50	1,20
	TN 16EL250M	T8010	■	■	■	□			●	+++	-	-	-	-	2,50	-	1,50	1,20
	TN 16EL300M	T8010	■	■	■	□			●	+++	-	-	-	-	3,00	-	1,50	1,20