

TN 60° PP INT





d

l

s

| | | | |
|----|--------|------|------|
| 11 | 6,350 | 11,0 | 3,00 |
| 16 | 9,525 | 16,5 | 3,47 |
| 22 | 12,700 | 22,0 | 4,71 |

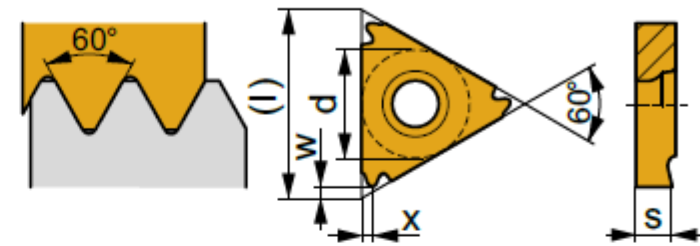

ISO



P

M

K

N

S

H



r_c

f_{min}

f_{max}

$a_{p min}$

$a_{p max}$



x

w



TN 11NRA60

T8010



+++

-

-

-

-

-

0,50 - 1,50

48,0 - 16,0

0,80

0,70

TN 16NRA60

T8010



+++

-

-

-

-

-

0,50 - 1,50

48,0 - 16,0

0,80

0,70

TN 16NRAG60

T8010



+++

-

-

-

-

0,50 - 3,00

48,0 - 8,0

1,50

1,10

TN 16NRG60

T8010



+++

-

-

-

-

1,75 - 3,00

14,0 - 8,0

1,50

1,10

TN 22NRN60

T8010



+++

-

-

-


-

3,50 - 5,00

7,0 - 5,0

2,50

1,80



TN 16NLAG60

T8010



+++

-

-

-

-

0,50 - 3,00

48,0 - 8,0

1,50

1,10

