


TN M60 PP INT

	d	l	s
11	6,350	11,0	3,00
16	9,525	16,5	3,47
22	12,700	22,0	4,71

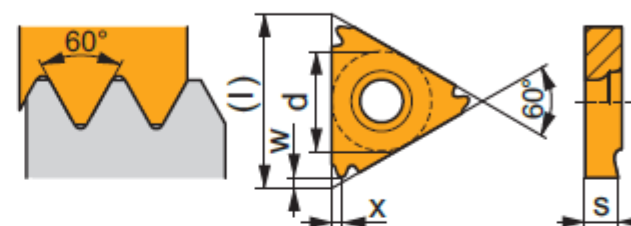

		ISO		P	M	K	N	S	H			r_c	f_{min}	f_{max}	$a_{p min}$	$a_{p max}$		$\frac{1}{1''}$	x	w
		TN 11NRA60	T8030	■	■	■	□	▣	□	●	+++	-	-	-	-	-	0,50 - 1,50	48,0 - 16,0	0,80	0,70
		TN 16NRA60	T8030	■	■	■	□	▣	□	●	+++	-	-	-	-	-	0,50 - 1,50	48,0 - 16,0	0,80	0,70
		TN 16NRAG60	T8030	■	■	■	□	▣	□	●	+++	-	-	-	-	-	0,50 - 3,00	48,0 - 8,0	1,50	1,10
		TN 16NRG60	T8030	■	■	■	□	▣	□	●	+++	-	-	-	-	-	1,75 - 3,00	14,0 - 8,0	1,50	1,10
		TN 22NRN60	T8030	■	■	■	□	▣	□	●	+++	-	-	-	-	-	3,50 - 5,00	7,0 - 5,0	2,50	1,80
		TN 11NLA60	T8030	■	■	■	□	▣	□	●	+++	-	-	-	-	-	0,50 - 1,50	48,0 - 16,0	0,80	0,70
		TN 16NLA60	T8030	■	■	■	□	▣	□	●	+++	-	-	-	-	-	0,50 - 1,50	48,0 - 16,0	0,80	0,70
		TN 16NLAG60	T8030	■	■	■	□	▣	□	●	+++	-	-	-	-	-	0,50 - 3,00	48,0 - 8,0	1,50	1,10
		TN 16NLG60	T8030	■	■	■	□	▣	□	●	+++	-	-	-	-	-	1,75 - 3,00	14,0 - 8,0	1,50	1,10
		TN 22NLN60	T8030	■	■	■	□	▣	□	●	+++	-	-	-	-	-	3,50 - 5,00	7,0 - 5,0	2,50	1,80