

# TN W55 PP INT




d

l

s

11	6,350	11,0	3,00
16	9,525	16,5	3,47
22	12,700	22,0	4,71

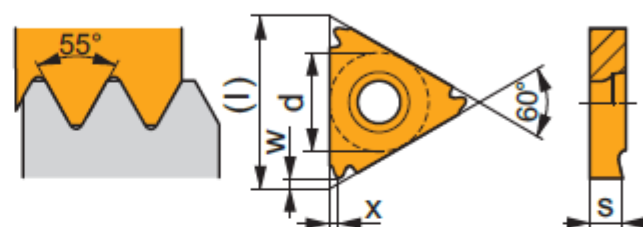

ISO



P

M

K

N

S

H



r<sub>c</sub>

f<sub>min</sub>

f<sub>max</sub>

a<sub>p min</sub>

a<sub>p max</sub>



x

w



TN 11NRA55

T8030



+++

-

-

-

-

0,50 - 1,50

48,0 - 16,0

0,80

0,60

TN 16NRA55

T8030



+++

-

-

-

-

0,50 - 1,50

48,0 - 16,0

0,80

0,60

TN 16NRAG55

T8030



+++

-

-

-

-

0,50 - 3,00

48,0 - 8,0

1,50

1,10

TN 16NRG55

T8030



+++

-

-

-

-

1,75 - 3,00

14,0 - 8,0

1,50

1,10

TN 22NRN55

T8030



+++

-

-

-


-

3,50 - 5,00

7,0 - 5,0

2,50

1,80



TN 11NLA55

T8030



+++

-

-

-

-

0,50 - 1,50

48,0 - 16,0

0,80

0,60

TN 16NLA55

T8030



+++

-

-

-

-

0,50 - 1,50

48,0 - 16,0

0,80

0,60

TN 16NLAG55

T8030



+++

-

-

-

-

0,50 - 3,00

48,0 - 8,0

1,50

1,10

TN 16NLG55

T8030



+++

-

-

-

-

1,75 - 3,00

14,0 - 8,0

1,50

1,10

TN 22NLN55

T8030



+++

-

-

-

-

3,50 - 5,00

7,0 - 5,0

2,50

1,80

