



Slot drills


extra long, centre cutting, 3 - fluted



- CZ** Frézy pro drážky per | extra dlouhé, nesouměrné, třízubé
- DE** Langlochfräser | extra lang, dreischneider mit Zentrumschnitt
- RU** Фрезы шпоночные | екстра длинные, трехзубые, несимметричные

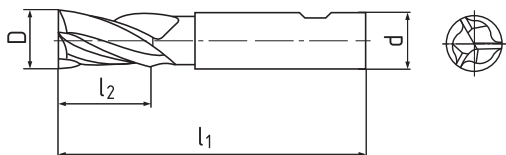

2334

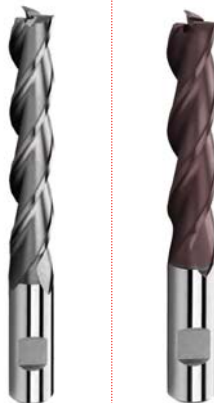

D e 8	d h 6	l1	l2	Z	233418	233418
2	6	54	10	3	.020	.020 TIALN
3	6	56	12	3	.030	.030 TIALN
4	6	63	19	3	.040	.040 TIALN
5	6	68	24	3	.050	.050 TIALN
6	6	68	24	3	.060	.060 TIALN
8	10	88	38	3	.080	.080 TIALN
9	10	88	38	3	.090	.090 TIALN
10	10	95	45	3	.100	.100 TIALN
12	12	110	53	3	.120	.120 TIALN
14	12	110	53	3	.140	.140 TIALN
16	16	123	63	3	.160	.160 TIALN
18	16	123	63	3	.180	.180 TIALN
20	20	141	75	3	.200	.200 TIALN
22	20	141	75	3	.220	.220 TIALN
25	25	166	90	3	.250	.250 TIALN

Cutting conditions | Řežné podmínky | Schnittbedingungen | Условия резания

Material	Ap	Ae	Vc	fz (mm/z)								
				Ø 3	Ø 6	Ø 8	Ø 10	Ø 12	Ø 16	Ø 18	Ø 20	
P.1 ≤ 600 N/mm ²	0,5xD	1xD	45	0,009	0,022	0,029	0,036	0,044	0,058	0,068	0,073	
P.2 ≤ 850 N/mm ²	0,5xD	1xD	39	0,009	0,022	0,029	0,036	0,044	0,058	0,068	0,073	
P.3 ≤ 1100 N/mm ²	0,5xD	1xD	24	0,009	0,022	0,029	0,036	0,044	0,058	0,068	0,073	
P.4 ≤ 900 N/mm ²	0,5xD	1xD	30	0,009	0,022	0,029	0,036	0,044	0,058	0,068	0,073	
M.2 750 - 850 N/mm ²	0,5xD	1xD	15	0,009	0,022	0,029	0,036	0,044	0,058	0,068	0,073	
K.1 ≤ 820 N/mm ²	0,5xD	1xD	35	0,009	0,022	0,029	0,036	0,044	0,058	0,068	0,073	
K.2 > 800 N/mm ²	0,5xD	1xD	25	0,009	0,022	0,029	0,036	0,044	0,058	0,068	0,073	
N.2 ≤ 600 N/mm ²	0,5xD	1xD	160-300	0,0117	0,0286	0,0377	0,0468	0,0572	0,0754	0,0845	0,0949	
S.2 ≤ 1250 N/mm ²	0,5xD	1xD	12	0,0063	0,0154	0,0203	0,0252	0,0308	0,406	0,0455	0,0511	

TiAlN: Vc + 50 %