



T-A® Drill Insert Holders

0 Series | Flanged Shank

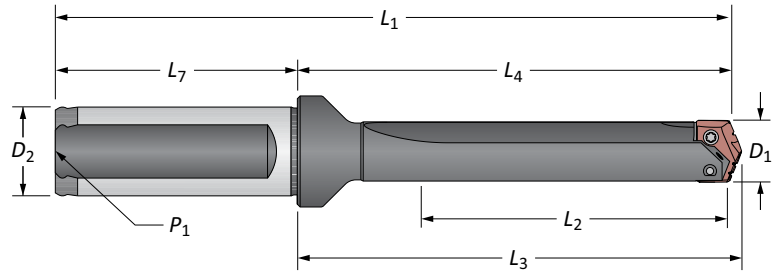

Stub Length

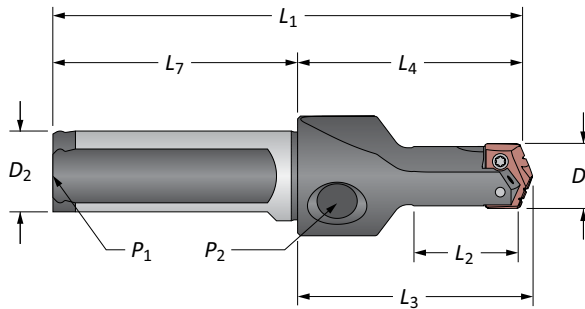

Straight Flute

Series	Length	D ₁	Body				Shank			Part No.	
			L ₂	L ₄	L ₃	L ₁	D ₂	L ₇	P ₁		
m	0	Stub	13.0 - 17.5	22.2	47.6	50.4	97.6	20.0	50.0	1/8*	21000S-20FM
		Short	13.0 - 17.5	34.9	63.5	66.3	113.5	20.0	50.0	1/8*	22000S-20FM
		XL	13.0 - 17.5	295.0	323.9	326.7	373.9	20.0	50.0	1/8*	▲ 27000S-20FM
		3XL	13.0 - 17.5	387.0	416.0	418.8	466.0	20.0	50.0	1/8*	▲ 29000S-20FM
0.5	Stub	15.5 - 17.5	22.2	47.6	50.4	97.6	20.0	50.0	1/8*	21005S-20FM	
	Short	15.5 - 17.5	34.9	63.5	66.3	113.5	20.0	50.0	1/8*	22005S-20FM	
i	0	Stub	33/64 - 11/16	7/8	1-7/8	1-63/64	3-29/32	3/4	2-1/32	1/8	21000S-075F
		Short	33/64 - 11/16	1-3/8	2-1/2	2-39/64	4-17/32	3/4	2-1/32	1/8	22000S-075F
		Standard	33/64 - 11/16	2-1/2	3-5/8	3-47/64	5-21/32	3/4	2-1/32	1/8	24000S-075F
		Extended	33/64 - 11/16	4-1/2	5-5/8	5-47/64	7-21/32	3/4	2-1/32	1/8	▲ 25000S-075F
	0.5	Stub	39/64 - 11/16	7/8	1-7/8	1-63/64	3-29/32	3/4	2-1/32	1/8	21005S-075F
		Short	39/64 - 11/16	1-3/8	2-1/2	2-39/64	4-17/32	3/4	2-1/32	1/8	22005S-075F
		Standard	39/64 - 11/16	2-1/2	3-5/8	3-47/64	5-21/32	3/4	2-1/32	1/8	24005S-075F
		Extended	39/64 - 11/16	4-1/2	5-5/8	5-47/64	7-21/32	3/4	2-1/32	1/8	▲ 25005S-075F


*Metric thread to BSP and ISO 7-1

NOTE: Stub length holders have a 1/8" side pipe tap (P₂)

Connection Accessories

Series	Insert Screws	Nylon Locking Screws	Insert Driver	Preset Torque Hand Driver	Replacement Tips	Admissible Tightening Torque*
0	72556-IP8-1	72556N-IP8-1	8IP-8	8IP-8TL	8IP-8B	175 N-cm (15.5 in-lbs)
0.5	72567-IP8-1	72567N-IP8-1	8IP-8	8IP-8TL	8IP-8B	175 N-cm (15.5 in-lbs)

*Tightening torques are calculated with a friction coefficient of $\mu = 0.14$ and develop 90% of ultimate yield strength



m = Metric (mm)

i = Imperial (in)

Screws sold in quantities of 10

WARNING Refer to Speed and Feed charts for recommended adjustments to speeds and feeds. Refer to page A30: 148 for deep hole drilling guidelines in this section of the catalog. Visit www.alliedmachine.com for the most up-to-date information and procedures. Factory technical assistance is available for your specific applications through our Application Engineering Team.