


T-A® Drill Insert Holders

0 Series | Taper Shank

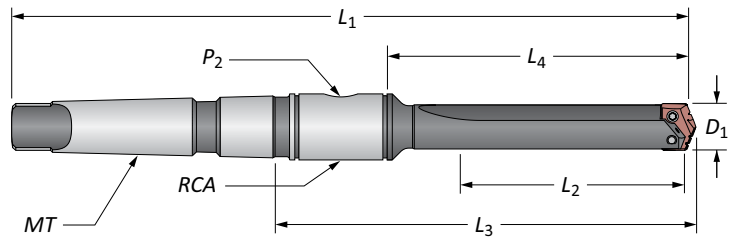

Straight Flute

Series	Length	D ₁	Body				Shank			Part No.	
			L ₂	L ₃	L ₄	L ₁	MT	P ₂	RCA		
m 0	Short	13.0 - 17.5	35.0	92.4	55.5	164.3	#2**	1/16*	2T-2SRM	22000S-002M	
0.5	Short	15.5 - 17.5	35.0	92.4	55.5	164.3	#2**	1/16*	2T-2SRM	22005S-002M	
i	0	Short	33/64 - 11/16	1-3/8	3-41/64	2-3/16	6-15/32	#2	1/16	2T-2SR	22000S-002I
		Standard	33/64 - 11/16	2-1/2	4-49/64	3-5/16	7-19/32	#2	1/16	2T-2SR	24000S-002I
		Extended	33/64 - 11/16	4-1/2	6-49/64	5-5/16	9-19/32	#2	1/16	2T-2SR	25000S-002I
	0.5	Short	39/64 - 11/16	1-3/8	3-41/64	2-3/16	6-15/32	#2	1/16	2T-2SR	22005S-002I
		Standard	39/64 - 11/16	2-1/2	4-49/64	3-5/16	7-19/32	#2	1/16	2T-2SR	24005S-002I
		Extended	39/64 - 11/16	4-1/2	6-49/64	5-5/16	9-19/32	#2	1/16	2T-2SR	25005S-002I


*Metric thread to BSP and ISO 7-1

**Per ISO 296 type BEK

Connection Accessories

Series	Insert Screws	Nylon Locking Screws	Insert Driver	Preset Torque Hand Driver	Replacement Tips	Admissible Tightening Torque*
0	72556-IP8-1	72556N-IP8-1	8IP-8	8IP-8TL	8IP-8B	175 N-cm (15.5 in-lbs)
0.5	72567-IP8-1	72567N-IP8-1	8IP-8	8IP-8TL	8IP-8B	175 N-cm (15.5 in-lbs)

*Tightening torques are calculated with a friction coefficient of $\mu = 0.14$ and develop 90% of ultimate yield strength

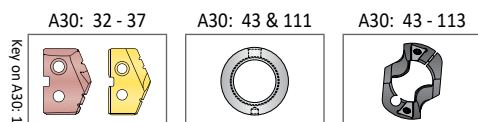

m = Metric (mm)

i = Imperial (in)

Screws sold in quantities of 10

WARNING Refer to Speed and Feed charts for recommended adjustments to speeds and feeds. Refer to page A30: 148 for deep hole drilling guidelines in this section of the catalog. Visit www.alliedmachine.com for the most up-to-date information and procedures. Factory technical assistance is available for your specific applications through our Application Engineering Team.