



## T-A® Original Drill Inserts



Y Series | HSS/Carbide | Diameter Range: 9.5mm - 11.0mm (0.374" - 0.436")




Flat Bottom

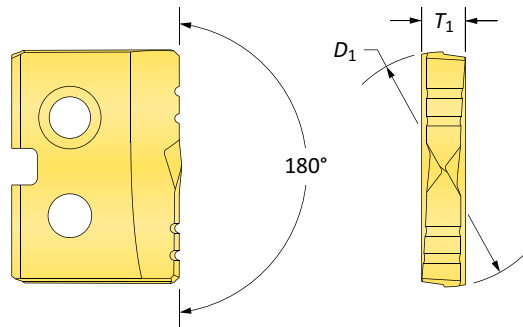

### HSS Inserts – Super Cobalt / Carbide Inserts - K20 (C2)

Insert				Flat Bottom Part No.	
$D_1$ mm	$D_1$ inch	Fractional Equivalent	$T_1$ mm	 HSS Co - TiN	 K20 (C2) - TiN
9.50	0.3740	–	2.38	15YT-9.5-FB	1C2YT-9.5-FB
9.53	0.3750	3/8		15YT-0012-FB	1C2YT-0012-FB
9.80	0.3860	W		15YT-.386-FB	1C2YT-.386-FB
9.92	0.3906	25/64		15YT-.390-FB	1C2YT-.390-FB
10.00	0.3937	–		15YT-10-FB	1C2YT-10-FB
10.20	0.4016	–		15YT-10.2-FB	1C2YT-10.2-FB
10.32	0.4063	13/32		15YT-0013-FB	1C2YT-0013-FB
10.50	0.4134	–		15YT-10.5-FB	1C2YT-10.5-FB
10.72	0.4219	27/64		15YT-.421-FB	1C2YT-.421-FB
10.80	0.4252	–		15YT-10.8-FB	1C2YT-10.8-FB
11.00	0.4331	–		15YT-11-FB	1C2YT-11-FB

- Ideální pro zploštění nebo vyrovnaní dna již existujícího otvoru s vysokou tuhostí
- Obsahuje malý 10° bod na středu destičky.



Coatings not listed above can be supplied as non-stocked standards. →

Inserts sold in quantities of 2

TIN = 131T-XXXX	