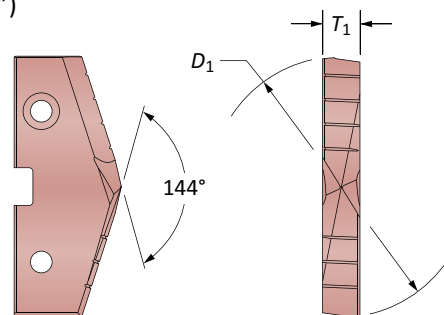




GEN2 T-A® Drill Inserts

6 Series | HSS | Diameter Range: 76.22mm - 89.08mm (3.001" - 3.507")

(for use with 5 series holders)



HSS Inserts – Super Cobalt | HSS

Insert			T ₁ mm	Super Cobalt Part No.	HSS Part No.
D ₁ mm	D ₁ inch	Fractional Equivalent		 AM200®	
76.99	3.0313	3-1/32	11.11	456H-0301	
77.79	3.0625	3-1/16		456H-0302	
78.00	3.0709	-		456H-78	
78.58	3.0938	3-3/32		456H-0303	
79.38	3.1250	3-1/8		456H-0304	
80.00	3.1496	-		456H-80	
80.17	3.1563	3-5/32		456H-0305	
80.96	3.1875	3-3/16		456H-0306	
81.76	3.2188	3-7/32		456H-0307	
82.00	3.2283	-		456H-82	
82.55	3.2500	3-1/4		456H-0308	
83.34	3.2813	3-9/32		456H-0309	
84.00	3.3071	-		456H-84	
84.14	3.3125	3-5/16		456H-0310	
84.93	3.3438	3-11/32		456H-0311	
85.73	3.3750	3-3/8		456H-0312	
86.00	3.3858	-		456H-86	
86.52	3.4063	3-13/32		456H-0313	
87.31	3.4375	3-7/16		456H-0314	
88.00	3.4646	-		456H-88	
88.11	3.4688	3-15/32	456H-0315		
88.90	3.5000	3-1/2	456H-0316		

Inserts sold in quantities of 1

Coatings not listed above
can be supplied as
non-stocked standards.



	AM200® = 131H-XXXX

Key on A30:1

