


Částečný profil 60° - ISO, UN

Pro vnitřní a vnější závit

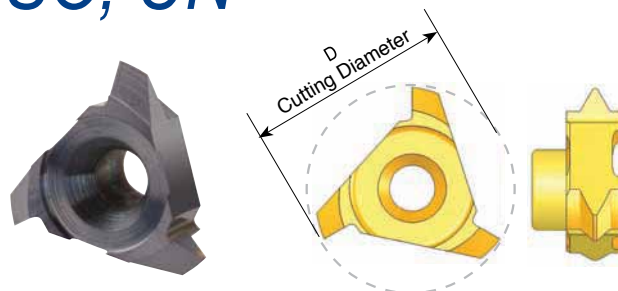

Typ korunky	Stoupání Range mm	Stoupání Range TPI	Objednací kód	D	Průměr závitu (min)		Kód držáku
					Stoupání nízký rozsah	Stoupání vysoký rozsah	
C10	Int. 0.5 - 0.8	56 - 28	C10 A60	10.0	Ø ≥ 11	Ø ≥ 12	H1, 2, 12, 13
	Ex. 0.4 - 0.8	64 - 32					
	Int. 1.0 - 2.0	28 - 13	C10 G60		Ø ≥ 12	Ø ≥ 14	H1, 2, 12
	Ex. 0.8 - 1.75	32 - 15					
C12	Int. 0.5 - 0.8	56 - 28	C12 A60	12.0	Ø ≥ 13	Ø ≥ 14	H3, 4, 5, 14, 15
	Ex. 0.4 - 0.8	64 - 32					
	Int. 1.0 - 2.0	28 - 13	C12 G60	12.4	Ø ≥ 14	Ø ≥ 16	
	Ex. 0.8 - 1.75	32 - 15					
C18	Int. 0.5 - 0.8	56 - 28	C18 A60	17.8	Ø ≥ 19		H6, 7, 8, 9, 16
	Ex. 0.4 - 0.8	64 - 32					
	Int. 1.0 - 1.75	28 - 14	C18 G60		Ø ≥ 20	Ø ≥ 21	
	Ex. 0.8 - 1.5	32 - 16					
	Int. 2.0 - 3.0	13 - 8	C18 D60		Ø ≥ 21	Ø ≥ 23	
	Ex. 1.75 - 2.5	15 - 10					
C25	Int. 1.5 - 2.5	16 - 10	C25 G60	25.0	Ø ≥ 28	Ø ≥ 30	H10, 11, 17, 18
	Ex. 1.0 - 2.0	28 - 13					
	Int. 3.0 - 5.0	8 - 5	C25 N60		Ø ≥ 30	Ø ≥ 34	
	Ex. 2.5 - 4.5	10 - 6					
	Int. 5.0 - 6.0	5 - 4	C25 Q60		Ø ≥ 34	Ø ≥ 35	
	Ex. 4.5 - 5.0	6 - 5					