





- První volba pro kvalitu a výkon
- PM Řezací závitník s lamačem třísek do průchozího otvoru
- Vícevrstvý povlak TiCN
- Vysokorychlostní závítování v uhlíkových, nerezových ocelích a hliníku


Typ 1



Typ 2

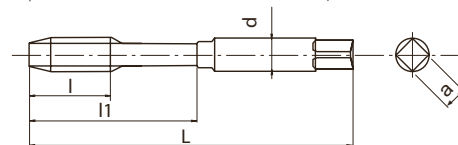

Typ 3

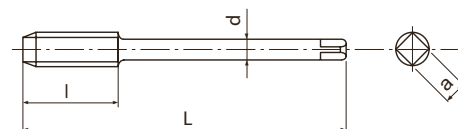

P	P	P	P	M	N	N	S	H	
C < 0,2%	0,25 < C < 0,4	C > 0,45%	SCM	INOX	Al	AC, ADC	Ti	25-35 HRC	
15-60	15-60	10-60	8-30	8-20	15-35	15-35	5-10	8-20	m/min

A	MF	PM	V	ISO 2 6HX	B/4	DIN 371	DIN 374
----------	-----------	-----------	----------	------------------	------------	----------------	----------------

EDP	MF	P	L	l	l1	d	a	Z	Typ	DIN
48145135	2,5	0,35	50	-	9	2,8	2,1	2	1	DIN371
48145137	2,6	0,35	50	-	9	2,8	2,1	2	1	DIN371
48145141	3	0,35	56	8	18	3,5	2,7	3	2	DIN371
48145143	3,5	0,35	56	9	20	4	3	3	2	DIN371
48145145	4	0,5	63	10	21	4,5	3,4	3	2	DIN371
48145146	4	0,35	63	10	21	4,5	3,4	3	2	DIN371
48145148	4,5	0,5	70	12	25	6	4,9	3	2	DIN371
48145151	5	0,5	70	12	25	6	4,9	3	2	DIN371
48145601	6	0,75	80	14	30	6	4,9	3	2	DIN371
48145602	6	0,5	80	14	30	6	4,9	3	2	DIN371
48145160	7	0,75	80	14	30	7	5,5	3	2	DIN371
48145603	8	1	90	22	35	8	6,2	3	2	DIN371
48145604	8	0,75	80	18	30	8	6,2	3	2	DIN371
48145605	9	1	90	22	35	9	7	3	2	DIN371
48145606	10	1,25	100	24	39	10	8	3	2	DIN371
48145607	10	1	90	20	35	10	8	3	2	DIN371
48145608	10	0,75	90	20	35	10	8	3	2	DIN371
48145156	6	0,75	80	14	-	4,5	3,4	3	3	DIN374
48145157	6	0,5	80	14	-	4,5	3,4	3	3	DIN374
48145162	8	1	90	22	-	6	4,9	3	3	DIN374
48145163	8	0,75	80	18	-	6	4,9	3	3	DIN374
48145167	9	1	90	22	-	7	5,5	3	3	DIN374
48145170	10	1,25	100	24	-	7	5,5	3	3	DIN374
48145171	10	1	90	20	-	7	5,5	3	3	DIN374
48145172	10	0,75	90	20	-	7	5,5	3	3	DIN374
48145176	11	1	90	20	-	8	6,2	3	3	DIN374
48145180	12	1,5	100	22	-	9	7	3	3	DIN374
48145181	12	1,25	100	22	-	9	7	3	3	DIN374
48145182	12	1	100	22	-	9	7	3	3	DIN374
48145192	14	1,5	100	22	-	11	9	4	3	DIN374
48145193	14	1,25	100	22	-	11	9	4	3	DIN374
48145194	14	1	100	22	-	11	9	4	3	DIN374
48145203	16	1,5	100	22	-	12	9	4	3	DIN374
48145204	16	1	100	22	-	12	9	4	3	DIN374
48145216	18	1,5	110	25	-	14	11	4	3	DIN374
48145218	18	1	110	25	-	14	11	4	3	DIN374
48145220	20	2	140	34	-	16	12	4	3	DIN374
48145230	20	1,5	125	25	-	16	12	4	3	DIN374
48145232	20	1	125	25	-	16	12	4	3	DIN374
48145239	22	2	140	34	-	18	14,5	4	3	DIN374
48145240	22	1,5	125	25	-	18	14,5	4	3	DIN374
48145241	22	1	125	25	-	18	14,5	4	3	DIN374
48145249	24	2	140	28	-	18	14,5	4	3	DIN374
48145250	24	1,5	140	28	-	18	14,5	4	3	DIN374
48145251	24	1	140	28	-	18	14,5	4	3	DIN374