

69871-CC-OZ

COLLET CHUCKS - OZ
KLEŠŤINOVÉ UPÍNÁČE – OZ
ЦАНГОВЫЕ ПАТРОНЫ - OZ
弹簧夹头 - OZ




Application:
For mounting straight-shank tools in collets.

Použití:
Pro upnutí nástrojů s válcovou stopkou do upínacího pouzdra.

Применение:
Для установки инструмента с цилиндрическим хвостовиком в цанге.

应用:
用于安装直柄刀具。

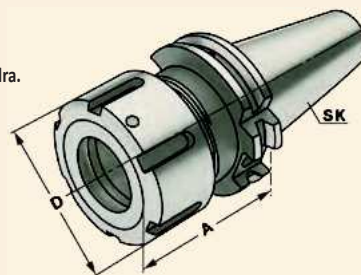

DIN 69871

Form
AD/B

$\nabla \leq 0,003$

G6,3
15.000 min⁻¹

Order no. Objednací č. Артикул 订单号	Taper Kůžel Конус 锥柄类型	Range Rozsah Диапазон 范围	A	D
69871.30AD-CC.OZ16.060	SK 30	2 – 16 (OZ 16)	60	43
69871.30AD-CC.OZ25.080	SK 30	2 – 25 (OZ 25)	80	60
69871.40ADB-CC.OZ16.070	SK 40	2 – 16 (OZ 16)	70	43
69871.40ADB-CC.OZ25.070	SK 40	2 – 25 (OZ 25)	70	60
69871.40ADB-CC.OZ32.090	SK 40	3 – 32 (OZ 32)	90	72
69871.40ADB-CC.OZ16.100	SK 40	2 – 16 (OZ 16)	100	43
69871.40ADB-CC.OZ25.100	SK 40	2 – 25 (OZ 25)	100	60
69871.50ADB-CC.OZ25.070	SK 50	2 – 25 (OZ 25)	70	60
69871.50ADB-CC.OZ32.080	SK 50	3 – 32 (OZ 32)	80	72
69871.50ADB-CC.OZ32.100	SK 50	3 – 32 (OZ 32)	100	72

Delivery: With ball bearing clamping nut
Dodávka: S upínací maticí s kuličkovým ložiskem
Поставляется: С зажимной гайкой с шарикоподшипником
交付: 带滚珠轴承夹紧螺母



194 - 199



240



190



231



231



232 - 234

DIN 69871

ISO 60

MAS 403 BT

DIN 2080

HSK-A

VDI

MORSE

