

MarCal 16 EWRI. Digital Caliper

Functions

- ON/OFF
- AUTO-ON / OFF
- HOLD (storage of measured values)
- RESET (set display to zero)
- PRESET (for entering a numerical value)
- Reversal of counting direction
- mm/inch
- LOCK function (key lock)
- DATA (Data transmission)


- High contrast analog display
- Locking screw above
- Lapped guideway
- Measuring blade for inside measurements
- Slide and beam made of hardened stainless steel
- Step measuring function
- Immediate measurements due to the Reference system
- Raised guideways for the protection of the scale
- Excellent resistance against dust, coolants and lubricants
- Dirt wipers are integrated in the slide
- SoftwareMarCom Professional free download:
www.mahr.com/marcom
(only for Mahr data cables and wireless systems with USB and RS232 interface)
- **Height of digits:** 11 mm
- **Data interface:** Integrated wireless
- **Energy supply:** Battery life approx. 3 years (approx. 0.5 in wireless mode)
- **IP protection category:** IP 67
- **Scope of delivery:** Battery, Instruction manual, Case



Technical Data


Order no.	Product type	Measuring range	Resolution	Error limit	Standard	Depth Rod	Friction wheel
		mm	mm/inch	mm			
4103400	16 EWRI	0–150	0,01 / .0005"	0,03	DIN 862	round	
4103401	16 EWRI	0–150	0,01 / .0005"	0,03	DIN 862	round	•
4103402	16 EWRI	0–150	0,01 / .0005"	0,03	DIN 862	rectangular	
4103403	16 EWRI	0–150	0,01 / .0005"	0,03	DIN 862	rectangular	•
4103404	16 EWRI	0–200	0,01 / .0005"	0,03	DIN 862	rectangular	
4103405	16 EWRI	0–200	0,01 / .0005"	0,03	DIN 862	rectangular	•
4103406	16 EWRI	0–300	0,01 / .0005"	0,04	Factory standard		
4103407	16 EWRI	0–300	0,01 / .0005"	0,04	Factory standard		•

Order no.	a	b	c	d	e
	mm	mm	mm	mm	mm
4103400	10	40	16	235	16
4103401	10	40	16	235	16
4103402	10	40	16	235	16
4103403	10	40	16	235	16
4103404	10	50	19	285	16
4103405	10	50	19	285	16
4103406	14	64	19	388	16
4103407	14	64	19	388	16

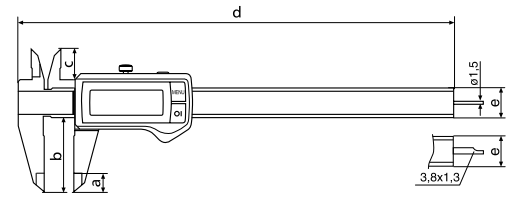

Accessories

Order no.	Product description	Product type
4102020	Depth bridge (75 x 7 mm)	16 Em
4102220	Receiver incl. Software MarCom Std.	i-Stick
4102520	Battery 3 V, CR 2032	



16 Em



i-Stick