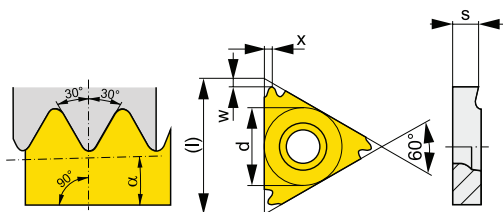



API
PLNÝ PROFIL
VNĚJŠÍ / VONKAJŠÍ

Velikost Velkosť	(l)	d	s	α		
16	16,5	9,525	3,47	1°47'		
22	22,0	12,700	4,71	4°46'		

Všechny rozměry / Všetky rozmery v [mm]

Nástroj viz strana / Nástroje vid' str.: 157

ISO	Počet závitů/1" Počet závitov/1"	Materiály	x	w	Posuv na ot.		Hloubka řezu Hĺbka rezu	
					f _{min}	f _{max}	a _{p min}	a _{p max}
	TN 16ER100API-RD01	10,0	●		1,50	1,10	-	-
	TN 16ER080API-RD01	8,0	●		1,70	1,20	-	-
	TN 22ER040API038-402	4,0	●		2,60	1,70	-	-
	TN 22EL040API038-402	4,0	○		2,60	1,70	-	-

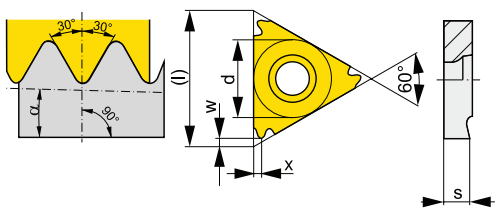API
PLNÝ PROFIL
VNITŘNÍ / VNÚTORNÝ

Velikost Velkosť	(l)	d	s	α		
16	16,5	9,525	3,47	1°47'		
22	22,0	12,700	4,71	4°46'		

Všechny rozměry / Všetky rozmery v [mm]

Nástroj viz strana / Nástroje vid' str.: 159

ISO	Počet závitů/1" Počet závitov/1"	Materiály	x	w	Posuv na ot.		Hloubka řezu Hĺbka rezu	
					f _{min}	f _{max}	a _{p min}	a _{p max}
	TN 16NR100API-RD01	10,0	●		1,50	1,10	-	-
	TN 16NR080API-RD01	8,0	●		1,70	1,20	-	-
	TN 22NR040API038-402	4,0	○		2,60	1,70	-	-
	TN 22NL040API038-402	4,0	○		2,60	1,70	-	-